



FRP Antenna with Mount

The fiber reinforced polymer (FRP) 4G Omni Antenna have 4~5dBi high-gain and minimum voltage standing wave ratio (V.S.W.R.). Working in 360° horizontal beamwidth, the 4G omnidirectional antenna receives and transmits wireless signals in all-direction.


The heavy-duty antenna magnetic mount is designed for multipoint mobile applications. The 90mm diameter stainless steel mount has premium quality magnetic with extreme strong holding power. The stainless steel has flannelette cover to avoid scratches to object surface.



Key Features

- Wideband cellular frequency 698~2700MHz
- Supports all of the 2G/3G/4G mobile networks
- High-gain 5dBi and low V.S.W.R
- All-Directional Omni antenna
- Magnetic Mount with 5-Meter Cable

Working Patterns

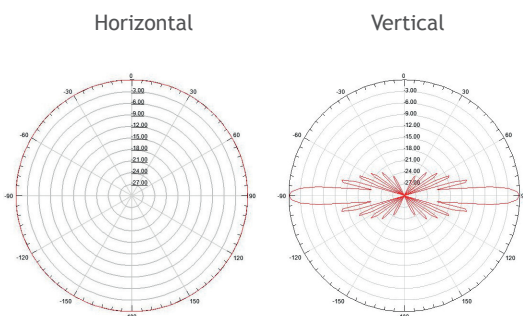

Package Includes

- 1 x 4G FRP Antenna
- 1 x Magnetic Mount

FRP Antenna Specifications

Frequency Range	698~960/1700~2700MHz
Gain	4~5 dBi
Polarization	Vertical
Beam Width	Horizontal 360° / Vertical 30°
V.S.W.R.	≤ 1.5
Max. Power	100 Watt
Impedance	50 ohm
Connector	N-Male
Measurement	Dia 20 x 400mm / 160gram

Mount Specifications

Dimension	Dia 90mm
Cable Length	5-Meter
Cable Standard	RG58
Base Connector	N-Female
Cable Connector	N-Male
Material	Stainless steel